


CHISINAU/Int'l (LUKK)
RNAV RWY 08
VOR/DME OVERLAY NETED1K
VOLVO1M

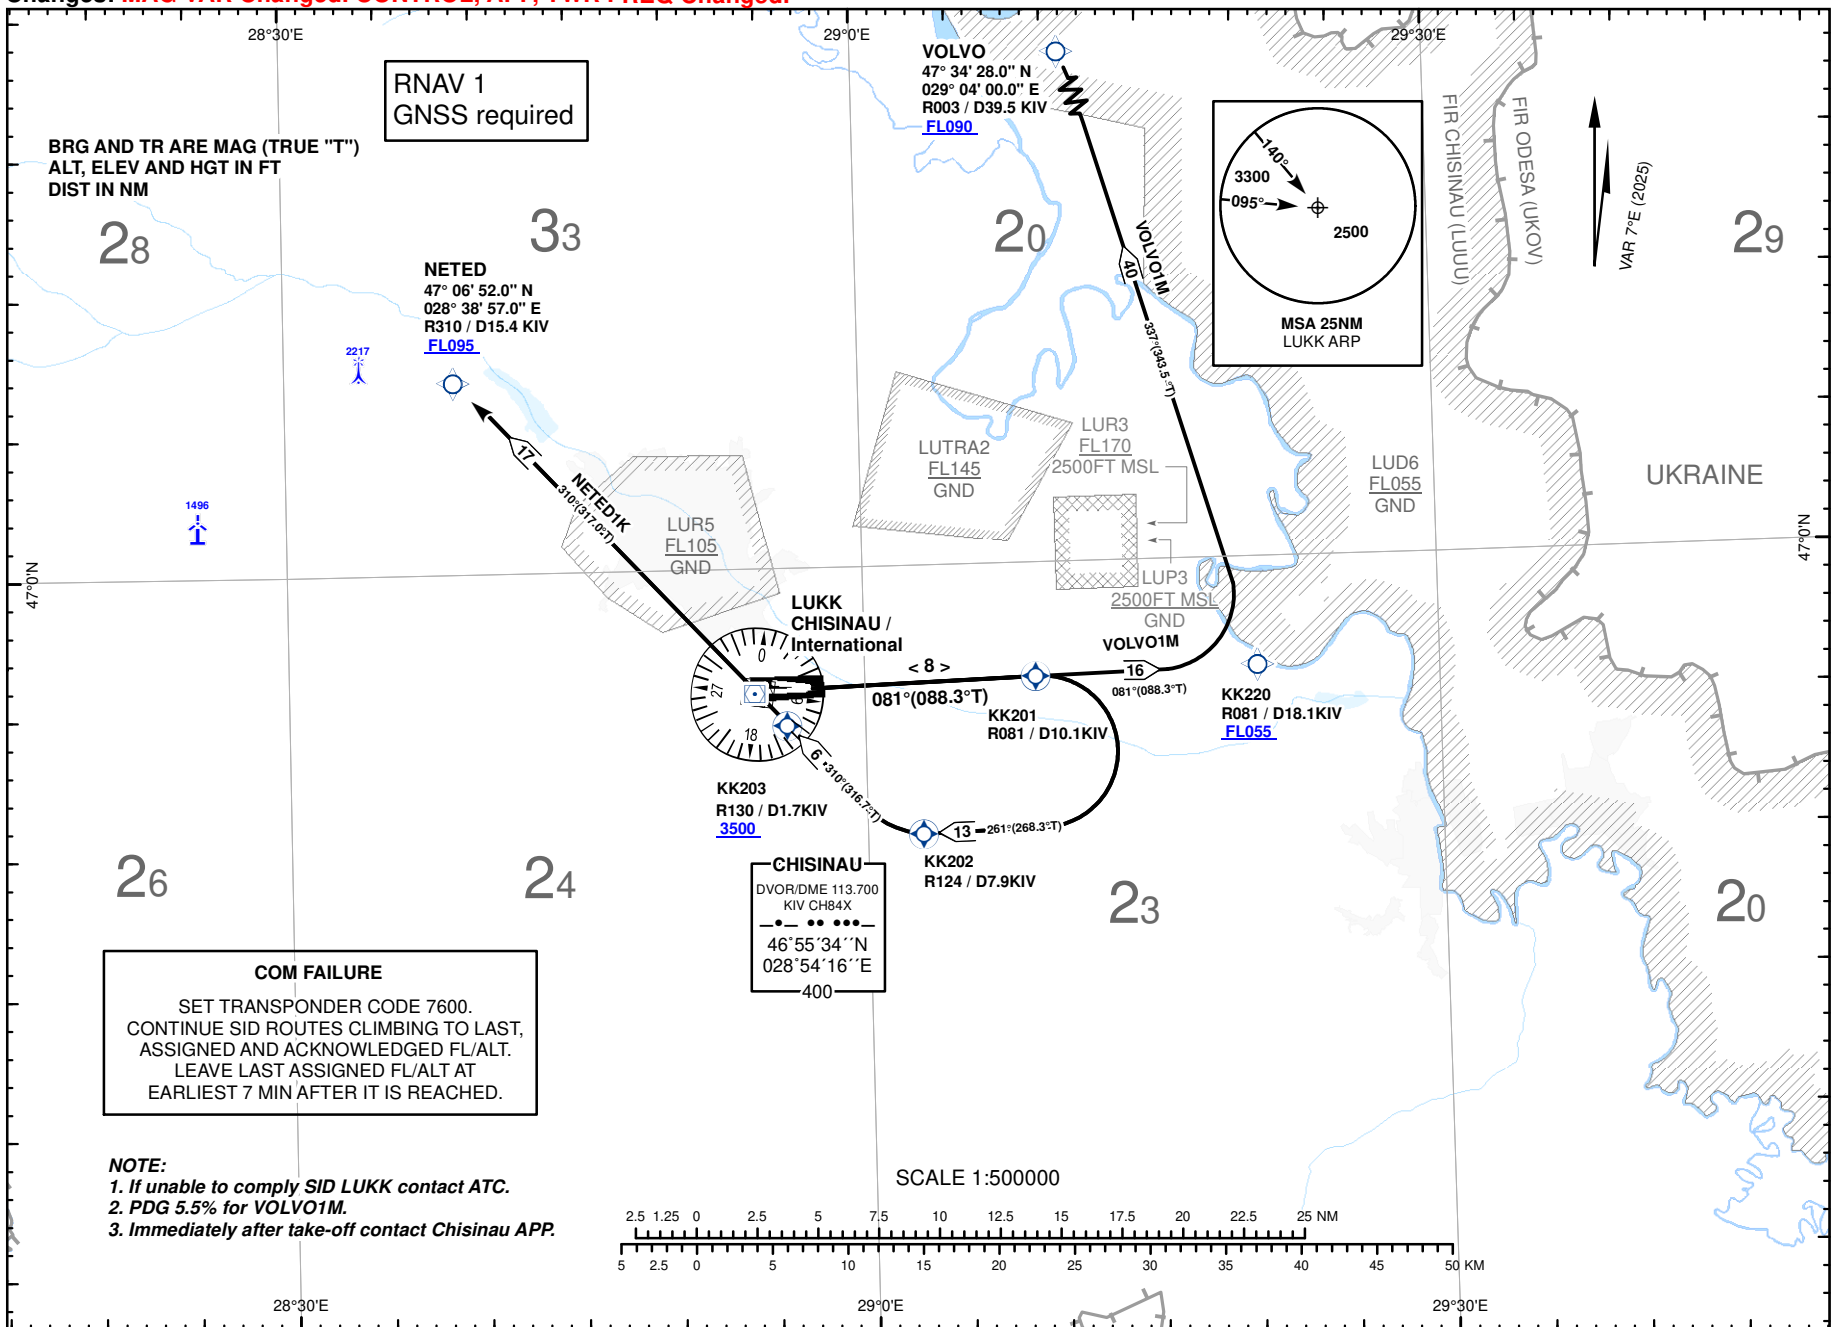

STANDARD DEPARTURE CHART–
INSTRUMENT (SID) – ICAOCHISINAU/IntI (LUKK)
RNAV RWY 08
VOR/DME OVERLAY

Procedure Coding Table

Path Terminator	Waypoint			Course/Track °M(°T)	Dist (NM)	Turn Direction	Constraints		Navigation Specification	Remarks
	Identifier	Flyover	Coordinates				Altitude (FT)	Speed (kt IAS)		
NETED1K (NETED ONE KILO DEPARTURE)										
CF	KK201	Y	465555.5N0290856.3E	081 (088.3)	8.0	-	-	-	RNAV 1	Turn at KK201 is calculated with bank 20° and speed 240kt IAS
DF	KK202	Y	465023.2N 0290253.6E	-	12.8	R	-	-		
DF	KK203	Y	465421.7N 0285555.4E	-	6.4	R	+3500FT	-		
TF	NETED	-	470652.0N 0283857.0E	310(317.0)	17.1	-	+FL095	-		
VOLVO1M (VOLVO ONE MIKE DEPARTURE)										
CF	KK220	-	465608.0N 0292036.5E	081 (088.3)	16.0	-	+FL055	-	RNAV 1	Turn at KK220is calculated with bank 25°
TF	VOLVO	-	473428.0N 0290400.0E	337 (343.5)	40.0	L	+FL090	-		