


**CHISINAU/Intl (LUKK)
ILS CAT II & III RWY 08**

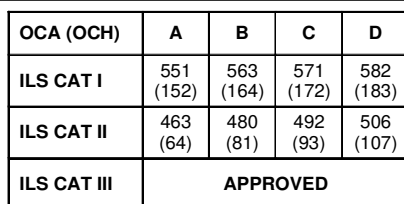

DME IRG	7	6	5	4	3	2	1
DIST THR	6.8	5.8	4.8	3.8	2.8	1.8	0.8
ALTITUDE (Height)	2500 (2101)	2297 (1898)	1978 (1579)	1660 (1261)	1342 (943)	1023 (624)	705 (306)

GS	kt	80	100	120	140	160	180
DISTANCE FAP-MAPT 6.1NM	MIN:SEC	04:35	03:40	03:03	02:37	02:17	02:02
Rate of Descent (5.2%)	FT/MIN	425	531	637	743	849	955

INSTRUMENT APPROACH
CHART – ICAO

CHISINAU/Intl (LUKK)
ILS CAT II & III RWY 08

AERONAUTICAL DATA TABULATION				
ILS CAT II & III RWY08 (ILS CAT II & III APPROACH RUNWAY ZERO EIGHT)				
POINT	LATITUDE	LONGITUDE	BEARING GEO° (MAG°)	DISTANCE (NM)
IAF VANIP	470111.0N	0282313.0E	285.00° (278°) KIV	22.00 KIV
IAF VESIK	464403.0N	0283027.0E	235.00° (228°) KIV	20.00 KIV
IF	465515.5N	0283713.1E	088.29° (081°) IRG	12.00 DME IRG
FAP	465526.4N	0284512.9E	088.29° (081°) IRG	6.52 DME IRG
MAPt	465537.9N	0285411.2E	088.29° (081°) IRG	0.40 DME IRG