
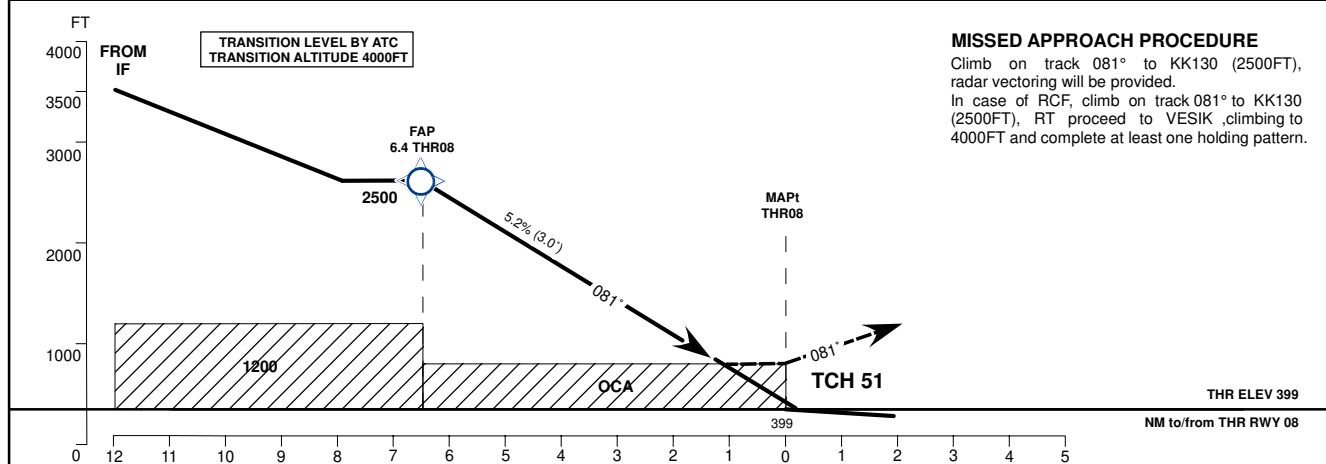


**CHISINAU/Intl (LUKK)
RNP RWY 08
(LNAV&LNAV/VNAV ONLY)**

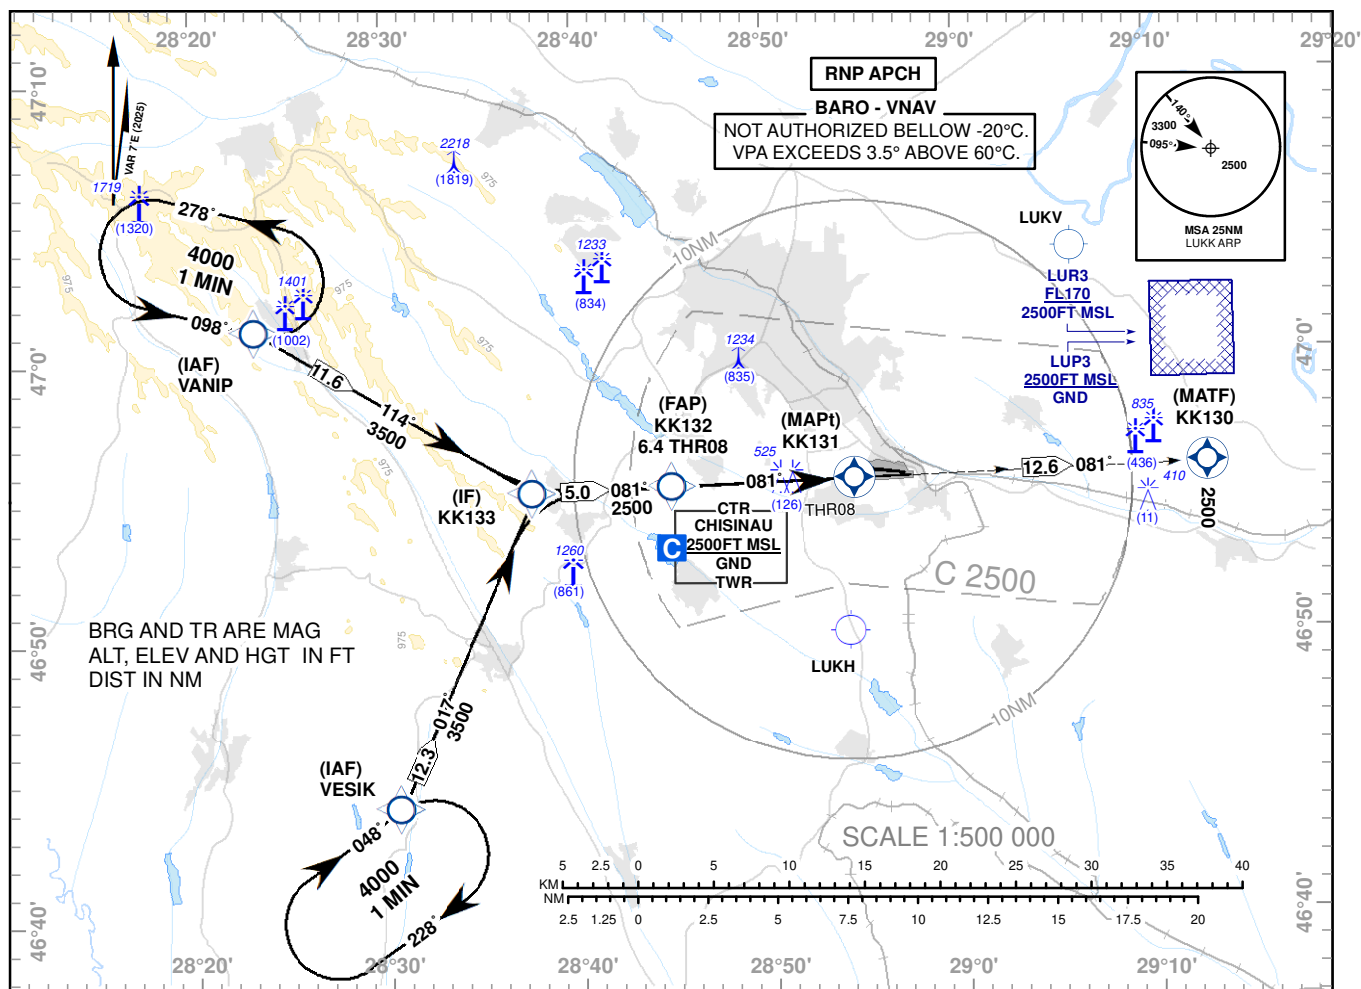

GS	kt	80	100	120	140	160	180
DISTANCE FAP-MAPt 6.4NM	MIN:SEC	04:50	03:52	03:13	02:46	02:25	02:09
Rate of Descent (5.2%)	FT/MIN	425	531	637	743	849	955

Changes: PBN box added.

INSTRUMENT APPROACH
CHART - ICAO

AD ELEV – 399FT
HEIGHTS RELATED TO
THR RWY 08 - ELEV 399FT

CHISINAU/Intl (LUKK)
RNP RWY 08
(LNAV&LNAV/VNAV ONLY)

TABULAR DESCRIPTION

RNP RWY 08 (RNP APPROACH RUNWAY ZERO EIGHT)											
Serial Number	Path descriptor	Waypoint Identifier	Fly-over	Course °M (°T)	°MAG VAR	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (Kt)	°VPA/ TCH (FT)	Navigation Specification
010	IF	VANIP	-	-	+7.0	-	-	+4000	-	-	RNP APCH
020	TF	KK133	-	114 (120.6)	+7.0	11.6	-	+3500	-210	-	RNP APCH
010	IF	VESIK	-	-	+7.0	-	-	+4000	-	-	RNP APCH
020	TF	KK133	-	017 (024.0)	+7.0	12.3	-	+3500	-210	-	RNP APCH
010	IF	KK133	-	-	+7.0	-	-	+3500	-	-	RNP APCH
020	TF	KK132	-	081 (088.3)	+7.0	5.0	-	@2500	-	-	RNP APCH
030	TF	RW08/ KK131	Y	081 (088.3)	+7.0	6.4	-	@448	-	3.00/51	RNP APCH
040	CF	KK130	Y	081 (088.3)	+7.0	12.6	-	+2500	-	-	RNP APCH

WAYPOINT LIST

RNP RWY 08		
Waypoint Identifier		
Coordinates		
IAF VANIP	47°01'11.0"N	028°23'13.0"E
IAF VESIK	46°44'03.0"N	028°30'27.0"E
KK133	46°55'16.6"N	028°37'44.9"E
KK132	46°55'26.4"N	028°45'02.5"E
RW08/KK131	46°55'38.34"N	028°54'26.51"E
KK130	46°55'59.5"N	029°12'53.8"E